



# ALL AMERICAN MONITORING

## Programming Steps – GoControl 2GIG

---


QUESTIONS	KEYPAD DISPLAY	KEYPAD ENTRY
Q - 8	Select Dialer	PRESS 1 to Enable Dialer
Q - 11	Enter CS #1 Phone Number	Enter 10 Digit Number
Q - 12	Enter CS #1 Account Number	Enter 4 Digit Number



# ALL AMERICAN MONITORING

Wiring the MN01-4G Cellular Communicator  
and Programming the Panel

## 2GIG

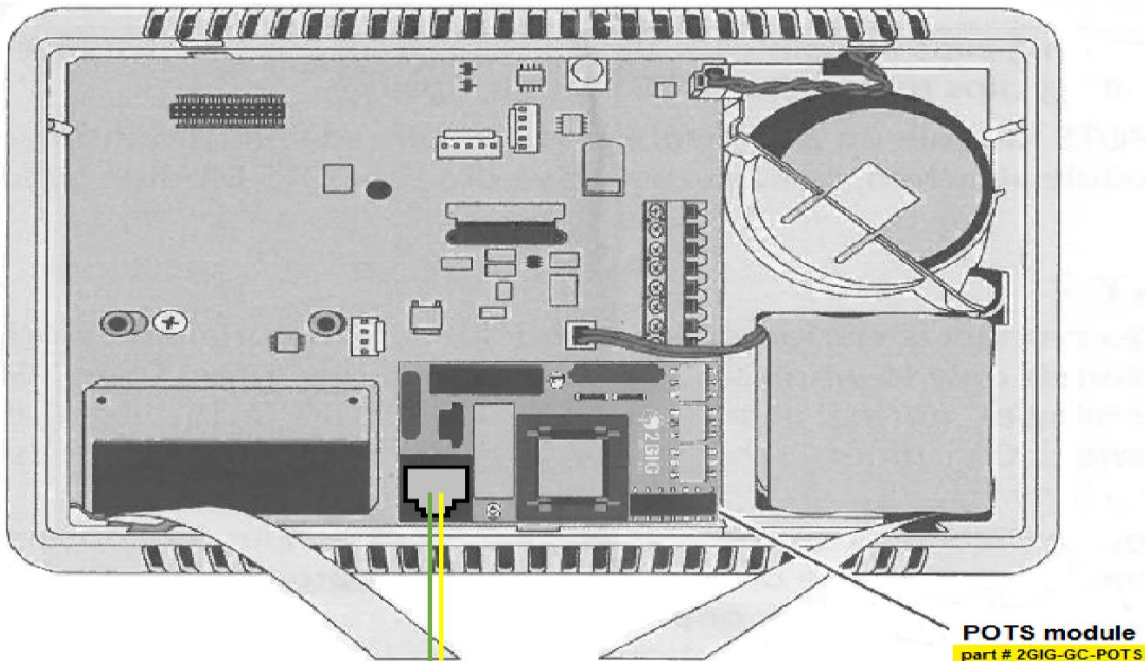

- 8 - HARDWIRE LOOP 2
- 7 - HARDWIRE LOOP 1
- 6 - BELL (-)
- 5 - BELL (+)
- 4 - OPEN COLLECTOR OUTPUT
- 3 - GROUND
- 2 - 14 VDC POWER INPUT (-)
- 1 - 14 VDC POWER INPUT (+)

**NEW FEATURE:** For Mini01-4G-V2, the status of the panel can be retrieved not only from the status PGM but now also from the Keyswitch arm/disarm. Therefore, wiring the white wire and programming of the status PGM of the panel is optional.

Wiring the white wire is necessary only if the Open/Close reporting is enabled.

**IMPORTANT NOTE:** The Open/Close reporting needs to be enabled during the initial pairing procedure.